




Specifications	
Input Voltage	110/240VAC, 50/60Hz, Single Phase
Input Voltage Range	Autoranging 85-264VAC
Maximum Operation Current	0.5 amps at 110-240VAC. Fuse rating 2 amps SloBlow
Input frequency	50 ~ 60Hz
DC output voltage	5V
Output voltage tolerance	2 %
Output rated current	4.5A
Output current range	0.1A ~ 4.7A
Ripple & Noise (p-p)	100mV
DC output power	22.5W
Efficiency	74%
Over voltage protection	5.75 ~ 6.2V
Fuse rating	2A
Output protection	When shorted, shutdown
External connections	20 point terminal block connector, max. wire size #14 AWG
Weight	440 g



Note: No 24 VDC output voltage is available for powering I/O devices

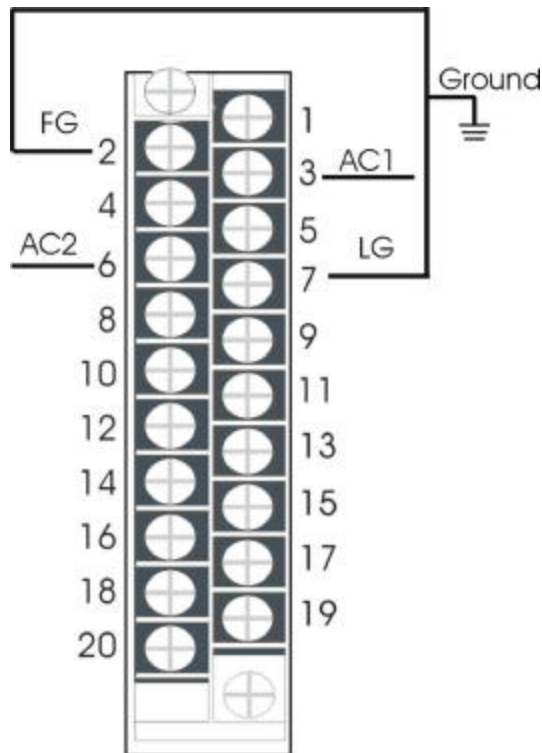