


SoftPLC Web Studio - HMI Models SSH-15CLP, -15CI5, -15XLP, -15XI5

FUNCTIONALITY				
Model	SSH-15CLP	SSH-15CI5	SSH-15XLP	SSH-15XI5
Tags / Drivers	300 / 1	1500 / 3	300 / 1	1500 / 3
Operating System	Windows CE	Windows CE	WinXPe	WinXPe
Storage	2GB Compact Flash	2GB Compact Flash	8GB Compact Flash	8GB Compact Flash

SPECIFICATIONS					
SYSTEM HARDWARE			LCD DISPLAY		
CPU	1.6GHz Intel Atom		Display Size / Type	15" XGA TFT LCD	
	1.3GHz Intel Atom (extended temp. opt)		Max Resolution	1024 X 768	
Ports	LAN	(1) 10/100/1000Base-T	Max Colors	262K	
	Serial	(2) RS-232	Luminance cd/m ²	350	
	USB	(2) USB 2.0	Viewing Angle (H/V)	120/100	
	Other	(1) PS/2	Backlight Life	50,000 hours	
Expansion	n/a		Contrast Ratio	500:1	
Memory	1GB DDR SDRAM (Optional 2GB)		ENVIRONMENT		
Watchdog Timer	1~255 sec (system)		Humidity	10 ~ 95% @ 40°C, non-condensing	
TOUCHSCREEN			Protection	Ingress	Front Panel: NEMA4, IP65
Lifespan (min)	1M activations			Vibration	2 Grms (Operating, Random)
Light Transmission	Above 75%		Temperature	Operating	0 ~ 45°C, 32 ~ 113°F (-20 ~ 60°C opt)
Resolution / Type	Linearity / 8-wire, analog resistive			Storage	-20 ~ 60°C, -4 ~ 140°F
			Certifications	BSMI, CCC, CE, FCC, UL	
MECHANICAL					
Enclosure	Al-Mg (front bezel), SECC (housing)		Power	Consumption	42W
Weight (Net)	5 kg, 11.02 lbs			Input	18 ~ 32VDC
Cooling System	Fanless Design		Recommended Power Supply		ICO-PS12024
Dimensions (WxHxD)	15.08 x 12.09 x 2.12 in 383 x 307 x 54 mm		Panel Cut-Out Dimensions		374.5 x 298.5 mm

Dimensions Units = mm

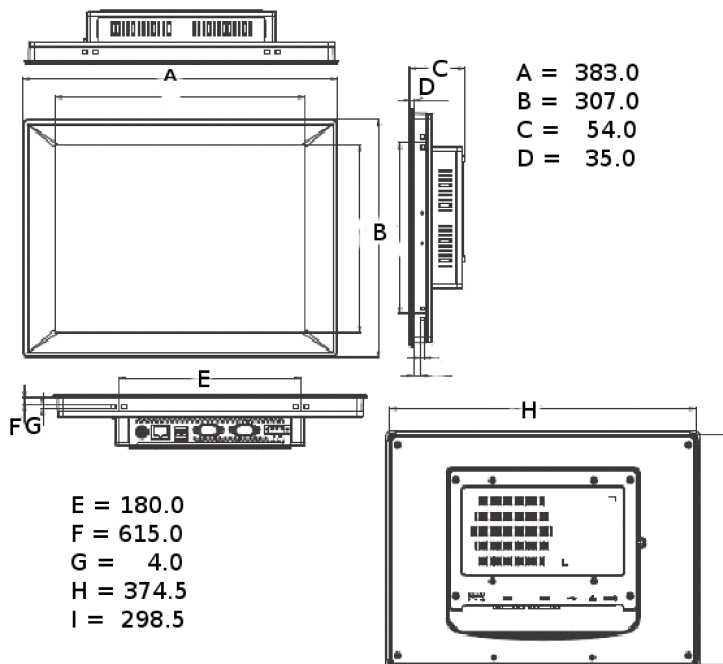

Rear View

- a. Power Receptor
- b. COM (RS-232)
- c. USB 2.0
- d. LAN (10/100/1000)
- e. PS/2

