


SoftPLC™ Web Studio HMI

Catalog Number - SSH-17XP

General Description

SoftPLC Web Studio HMI's (Cat. Nos. SSH-x) are rugged graphical operator interfaces with a high resolution touchscreen display. Shallow depth, fanless design, and industrial packaging make these HMI's suitable for a wide range of applications and mounting options. SSH HMI's can be used in applications ranging from simple machine controls to complete SCADA systems, in industries such as packaging, utilities, discrete manufacturing, batch/continuous processing, HVAC, and many more.

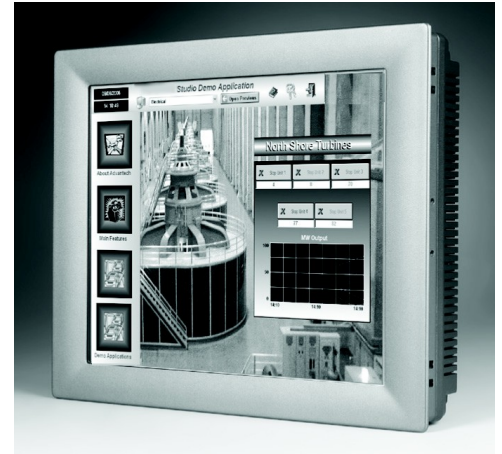

HMI Features

All SSH HMI models use the same powerful SoftPLC Web Studio development software, and the same application can be downloaded to any SSH HMI. Loaded with features, yet easy to use, applications can include:

- ◆ Object oriented graphic displays with customizable objects
- ◆ Extensive graphics library, or use imported files from over 15 formats
- ◆ Data Logging & Reporting
- ◆ Real-time & Historical Trending
- ◆ Alarm & Recipe Management
- ◆ Tag database with variety of data types
- ◆ Programming via flexible scripting language with over 100 functions
- ◆ Automatic language translation (Unicode supported)

In addition to the physical HMI system, the runtime application screens can be viewed simultaneously on a remote computer that connects over a TCP/IP (Internet/Intranet) web link, through the built-in Client/Server architecture. Any Client screen that displays data based on Tag values will be automatically updated whenever a Tag changes value on the Server (HMI). Security and encryption of web data is supported. A single Client session is included with each SSH unit, additional concurrent sessions can be purchased.

Two types of Web Clients are supported:

- ◆ Web Clients allow access from a common Web Browser (eg: Microsoft Internet Explorer, Netscape or Firefox). This is useful when browsing to multiple web sites may be required, such as in a desktop environment.
- ◆ Thin Clients (Secure Viewer-Based Browser) only allow access through a dedicated browser (included) that allows connection to a Web Studio Server, but the capability to browse to alternative web sites is not allowed. This provides additional security for plant-floor or dedicated supervisory applications.

Hardware Features

All SSH HMI models include these state-of-the-art features, at no extra cost:

- ◆ High Resolution TFT Touchscreen display with 260K or more colors (64K for SSH-30Cx/60Cx)
- ◆ Bright display with wide viewing angle
- ◆ Ethernet, Serial & USB communication ports
- ◆ Removable Compact Flash (SSH-30Cx has SD flash)
- ◆ Fanless operation, NEMA4/IP65 front panel
- ◆ Suitable for industrial environments, 0-50°C (32-122°F)

25603 Red Brangus Drive, Spicewood, TX 78669
512-264-8390 or 800-SoftPLC (US/Canada)
FAX: 512-264-8399 info@softplc.com




www.softplc.com

Specifications - SSH-17XP				
Functionality				
Database Tags	1500 tags, expandable to 4,000 tags	Multiple Port Connectivity	3 drivers, expandable to 8 drivers	
System Hardware				
CPU	1.5GHz Core™2 Duo L7400			
Ports	LAN	(2) 10/100/1000Base-T	USB	(4) USB 2.0
	Serial	(3) RS-232	Other	(1) PS/2 mouse (1) PS/2 keyboard (1) S-Video (1) MIC (1) Line-in (1) Line-out
Expansion Slots	(1) Compact Flash (1) PCI-104 (1) RS-422/485		Memory	2GB DDR2 SDARM
			O/S	WinXPe
Storage	32GB SDD		Watchdog Timer	1 sec (system)
LCD Display				
Display Type	SXGA TFT LCD		Display Size	17"
Max Resolution	1280 x 1024		Max Colors	16.7M
Luminance cd/m²	300		Viewing Angle (H/V)	160/160
Backlight Life	50,000 hours		Contrast Ratio	800:1
Touchscreen				
Lifespan (minimum)	1M activations		Light Transmission	Above 75%
Type	8-wire, analog resistive		Resolution	Linearity
Environment				
Humidity	10~95% RH @ 40°C, non-condensing			
Ingress Protection	Front Panel: NEMA4, IP65		Vibration Protection	1 Grms (Random, Operating)
Operating Temperature	0 ~ 40°C, 32 ~ 113°F		Storage Temperature	-20 ~ 60°C, -4 ~ 140°F
Certifications				
BSMI, CCC, CE, FCC, UL				
Mechanical				
Dimensions (WxHxD)	16.3 x 13.68 x 3.66 inches, 414 x 347.5 x 93 mm			
Panel Cut-Out Dimensions	400.8 x 334.3 mm		Weight (Net)	8 kg , 17.64 lb
Enclosure	Front Bezel: Die-Cast Aluminum Housing: ABS + PC		Cooling System	Fanless design
Power Consumption	100W		Power Input	18~32VDC

Recommended Options	
GCL-x	Gatecraft™ Link Industrial Ethernet Switch
ICO-SSx	Surge Suppression Equipment
SSD-x	Studio Development Software
SSR-WSx	Web Thin Client License for x concurrent sessions (IE6.0 or later)
SSR-SVx	Thin Client License (Secure Viewer-based Browser) for x concurrent sessions
SS-BSS	SoftPLC Studio Technical Support/Update Plan

SSH-17x Back View

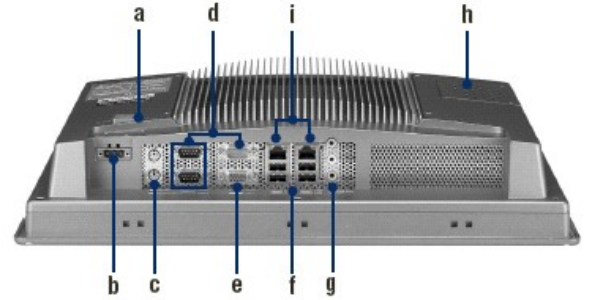

- a. Power Switch, Fuse
- b. Power Receptor
- c. PS/2
- d. COM (RS-232)
- e. VGA
- f. USB 2.0
- g. Audio (Line-In, Line-Out, MIC)
- h. 2.5" SATA HDD Housing
- i. LAN (10/100/1000)

SSH-17x Mounting Diagram

